


LEUCOS®

INSTRUCTIONS FOR INSTALLATION MICENE S



A1

Allegato
Enclosed



Montaggio a 2 persone
Two installers



Conservare le istruzioni
Save instructions

Indice di edizione - Revised
30 - Giugno - 2005

**GENERAL NOTES: - FIXTURE TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- FOLLOW ALL LOCAL AND NATIONAL ELECTRIC CODES.**


1. (See Fig.1) Unscrew canopy cover "C" from canopy "A".
 2. Run supply wires through center hole in canopy "A" and attach canopy to the ceiling or to the J.B..
 3. Loosen screws on barrel crimp "F" and run cable through one hole in crimp and pull cable through crimp until desired fixture height is reached. Then loop cable through the other hole in crimp and tighten screws. Trim off excess cable once you are sure the fixture is at the correct height.
 4. (See Fig.4) Remove 3 screws "P" from fixture body "D" and install glass replacing screws "P".
 5. (See Fig.3) Level the glass by sliding the cable through holes in the fixture canopy "A" and holes in the fixture body "D". When the glass is level tighten set screw "G" on fixture body and hex screw "E" on canopy with the allen wrench provided.
 6. Install lamp in socket.
 7. (See Fig.5) Run wire through canopy cover "C" and through hole "H" in canopy "A" and tighten the two 3 mm nuts on wire clamp.
- NOTE:** Make sure the wire length is not shorter than the suspension cables such that the fixture is hanging from the electrical wire rather than the suspension cables!
9. Cut off excess wire leaving enough wire to make wire connections. Then make wire connections.
 10. Run canopy cover "C" up wire and screw into canopy. Make sure plastic wire protection bushing is firmly seated in center hole of canopy.
 11. Slide canopy ring "B" up cables and snap over the three spring loaded pins in the fixture canopy "A".

NOTE: FOR U.S.A. MARKET ONLY USE

150 WATT MAX, medium screw base, T-10 TYPE incandescent halogen lamp. 

100 WATT MAX, medium base type A-19 

FOR USA MARKET ONLY



MOUNTS TO STANDARD JUNCTION BOX

CIRCUIT DIAGRAM:

White neutral

Black phase

Green-yellow

Bare copper wire

Ground 

For additional information please contact
your local dealer or LEUCOS USA at:
tel. (732) 225-0010 fax (732) 225-0250

Fig.1




Fig.2




Fig.4

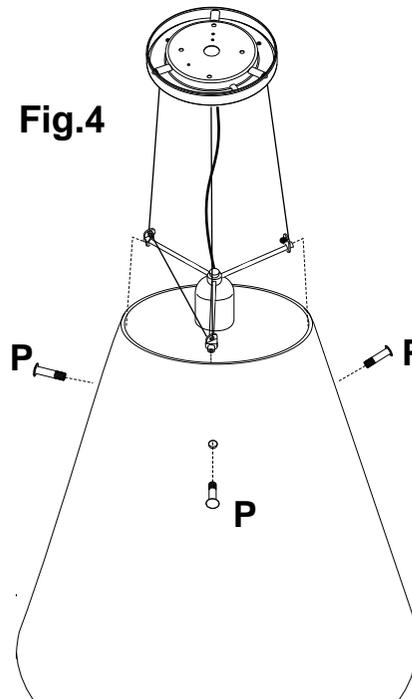


Fig.3

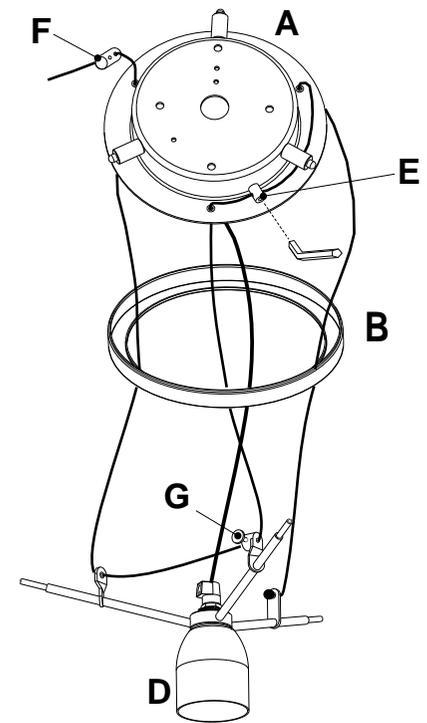


Fig.5

